


## Avaya B179 SIP Conference Phone

The **Avaya B179** is a conference phone for IP telephony. A manual containing details of features and settings and an administrator's manual for advanced configurations are both available on our website: [support.avaya.com](http://support.avaya.com).

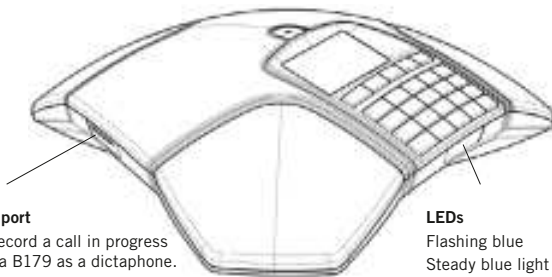

### SD memory card port

It is possible to record a call in progress and use the Avaya B179 as a dictaphone.


Press the **•** **←** button to start and stop recording.

Recordings can be accessed via the menu.

### LEDs

Flashing blue	Incoming call
Steady blue light	Call in progress
Flashing red	Hold, microphone and speaker turned off
Steady red light	Mute, microphone turned off

### Display symbols




### In call mode

- Line free
- Line connected
- Line on hold
- Line (called party) busy
- Line put on hold by other party
- Recording call
- Secure connection

### Before account name

- Telephone not registered
- Telephone registered

# DESCRIPTION

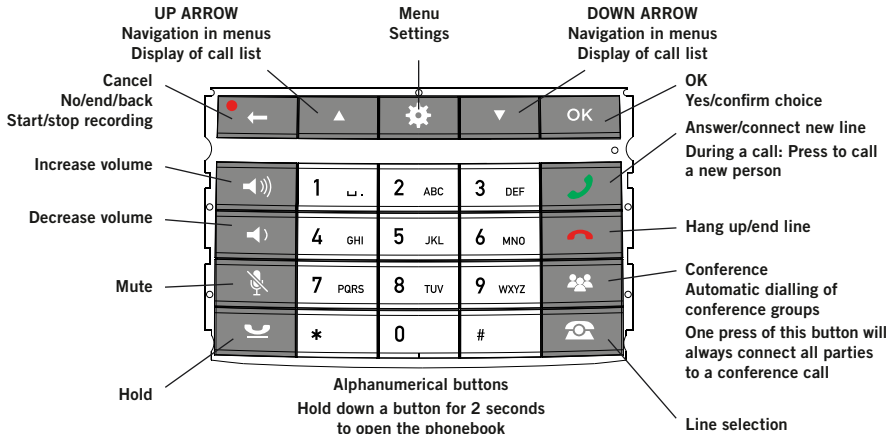

① Some Avaya B179 have a different keypad with other symbols. This does not affect the functions of the buttons.


## NAVIGATE IN MENUS AND MAKE SETTINGS

The Avaya B179 menu contains the following options:

**PROFILES**  
**PHONE BOOK**  
**EXT. PHONE BOOK**  
**CONF GUIDE**  
**RECORDING**  
**SETTINGS**  
**SYSTEM**  
**STATUS**

- 🌐 The simplest way to make settings and edit contacts is using a PC and the Avaya B179 web interface. Please refer to the manual for details.
- ➡ Press **⚙️**.
- ➡ Select the option you want from the menu using the arrow keys. Press **OK** to confirm.
- ➡ Cancel the setting or go back one level in the menu by pressing **⬅️**.
- ➡ Quit the menu by pressing **⚙️** again.
- 📌 Note that after you have made changes to a setting, you must press **OK** to activate the setting.
- 🌐 It is possible to open a menu option directly by pressing the number button that corresponds to the position of the option in the menu.

## CONNECTING

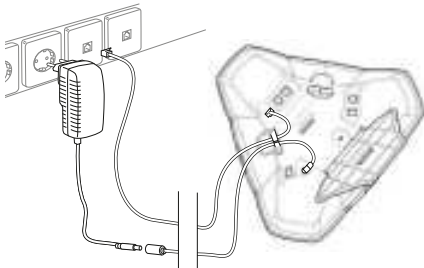

- ⇒ Connect the Avaya B179 to the network as illustrated above.
- ⇒ Plug the Avaya B179 into the mains using the power adapter as illustrated.
- ⓘ The Avaya B179 can be operated directly from the network (Power over Ethernet) if the network supports this.
- ⇒ Place the conference phone in the middle of the table.

## INSTALLATION AND REGISTRATION

“Avaya B179 SIP Conference Phone, Installation and Administration Guide” explains how you obtain a network address, select the basic settings and register an SIP account.

## ANSWERING AND MAKING CALLS



- ⇒ Press to answer an incoming call.
- ⇒ Dial the number and press to make a call.
- ⇒ Press an arrow key to open a call list containing previously dialled numbers. Call using .
- ⇒ Press and hold an alphanumeric button for two seconds to call a contact in the phonebook.

## DURING A CALL

- ⇒ Adjust the speaker volume using the keys and .
- ⇒ Press to turn off the microphone.
- ⇒ Press to put the call on hold.  
*Both the microphone and the speaker are turned off and the call is on hold.*
- ⇒ Press the same button again to reconnect the call.

# MULTI-PARTY CALLS



## ADDING A PARTY TO A CALL

- ⇒ Press  during the call to get a new dialling tone.  
*Calls in progress are put on hold.*
- ⇒ Dial the new number.
- ① You can also press an arrow key to use the call list or use the menu to access the phonebook.
- ⇒ Press the  key to connect the calls.

## THE CONFERENCE GUIDE


You can create groups via  > **CONF.**  
**GUIDE** > **ADD GROUP.**

### Making conference group calls



- ⇒ Press the  button and choose a conference group. Press **OK** if you want to see who is in the group and  to make the call.


*The Avaya B179 dials all the contacts in the group.*




*The box in front of a person's name fills as soon as that person answers.*





## SWITCHING BETWEEN LINES

- ⇒ Press .  
*All lines are put on hold.*
- ⇒ Press .  
*The line menu is displayed.*



- ⇒ Mark a line in the line menu and press **OK** or .  
*The party is reconnected to the call.*
- ⇒ Mark another line in the line menu and press  to switch to it or press **OK** to connect both the parties.
- ⇒ Press  to connect all parties to the call.

## END LINE

- ⇒ Press .  
*The line menu is displayed.*
- ⇒ Mark the line you want to end and press .